

ROTATING & XENON LIGHTBARS

Compact Light Bar (Rotating)

Our Compact Light Bar is designed to provide superior light output and maximum visibility.




Main Features:

- Dimensions: 400 (l) x 180 (w) x 134 (h) mm
- CE and 'E' approved (EMC)
- Dual voltage (12/24V)
- Reverse polarity protection
- Meets IP56 international protection standards
- -30°C to +50°C extreme temperature reliability.

Warranty:

- LAP offer a 12 month or 2000 hour guarantee on our products, subject to the item being fitted and used in accordance with the correct instructions.

Applications

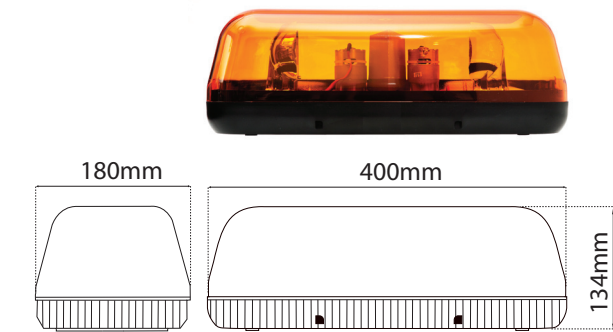

Source: Ford Europe

Part No	Voltage	Action	Colours	Current Consumption 12/24V	Flash Rate (Per min)	Mounting			ECE R65	Weight KG (Approx.)
						Magnetic	Single Bolt	Twin Bolt		
CLB55SA	12-24V	Rotating	Amber	9.2/6	180		•		•	2.5
CLB55MA	12-24V	Rotating	Amber	9.2/6	180	•			•	3.2
CLB55TA	12-24V	Rotating	Amber	9.2/6	180			•	•	2.5

Mini Light Bar (Rotating/Xenon)


Our popular Mini Light Bar range is designed to provide superior light output and maximum visibility for larger commercial vehicles.



Main Features:

- Dimensions: 550 (l) x 230 (w) x 188 (h) mm
  - ECE65 approved performance (Rotating and XHPL)
  - EMC approved
  - Dual voltage (12/24V)
  - Reverse polarity protection
  - Replaceable Xenon tubes
  - Optional single/double flash Xenons
  - Meets IP56 international protection standards
  - -30°C to +50°C extreme temperature reliability.
- Warranty:**
- LAP offer a 12 month or 2000 hour guarantee on our products, subject to the item being fitted and used in accordance with the correct instructions.

Applications

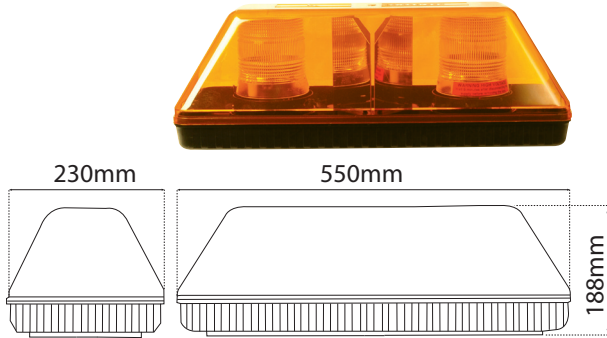

Source: Ford Europe

Part No	Voltage	Action	Colours	Current Consumption 12/24V	Flash Rate (Per min)	Mounting		ECE R65	Weight KG (Approx.)
						Magnetic	Single Point		
LAP 362	12-24V	Rotating	Amber	9.2/6.0	180		•	•	2.5
LAP 362 MAG	12-24V	Rotating	A/B/R	9.2/6.0	180	•			3.7
LAP 363	12-24V	Rotating	Blue	9.2/6.0	180		•	•	2.5
LAP 365	12-24V	Rotating	Red	9.2/6.0	180		•		2.5
XNML 010	10-30V	Sgl./Dbl.Fl.	A/B/R	3.2/1.6	125		•		2.5
XNML 010 MAG	10-30V	Sgl./Dbl.Fl.	A/B/R	3.2/1.6	125	•			3.7
XHPL 012	10-30V	Sgl./Dbl.Fl.	Amber	3.4/1.7	125		•	•	2.5
XHPL 013	10-30V	Sgl./Dbl.Fl.	Blue	3.4/1.7	125		•	•	2.5
XHPL 014	10-30V	Sgl./Dbl.Fl.	Red	3.4/1.7	125		•		2.5

FALCON & MINI LED LIGHTBARS

Falcon FLED300

Our Falcon FLED300 Light Bar brings the versatility and long life of the latest LED technology into a new price bracket.

**Main Features:**

- 300 x 5mm amber LEDs
- Dual Voltage (12/24V)
- 26 flash patterns, selectable using touch magnet card
- Fitted with 4 high performance magnets for secure mounting
- Dimensions: 422 (l) x 278 (w) x 65 (h) mm
- 12 month warranty.



**Applications**

  
Refuse Trucks

  
Utility Vehicles


  
Fleet

Mini LED Lightbars

Our new mini LED Lightbars are ideal for fleet applications.

**Main Features:**


- Dual voltage (12/24V)
- EMC approved
- 10 flash patterns
- Magnetic mount
- Weatherproof and vibration resistant design
- Tough polycarbonate lens and ABS base
- Low power consumption - 12V max 1A, 24V max 0.5A
- Dimensions: 297 (l) x 175 (w) x 53 (h) mm
- Extreme temperature reliability
- 12 month warranty.



Part No	Lens	No. modules	LEDs	LED Rating
LAP1220MAG	Amber	10	20	0.5W
LAP1230MAG	Amber	10	30	1.0W

**Applications**

  
Utility Vehicles

  
Fleet

ECLIPSE LED LIGHTBARS

Our latest range of LED Lightbars feature tough polycarbonate lenses and the latest generation LEDs with advanced optics. They have been designed to meet all the necessary standards for on and off-road use.

**Main Features:**

- Sizes available: 23.5" (60cm), 35.5" (90cm) & 47" (1.2m)
- ECE R65 approval
- EMC approved (ECE R10)
- Clear lenses
- Magnetic mount available (23.5" only)
- 5 selectable flash patterns
- Voltage: 12V (24V converters available upon request).



**Materials:**

- Polycarbonate lens with aluminium base.

**Warranty:**

- 3 year warranty.



Applications

  
Refuse Trucks

  
Utility Vehicles

  
Fleet

Part No	Size	No. of Modules	No. of LEDs
LAP2314AC LAP2314AC/MAG	23.5" (60cm)	14	56
LAP3518AC	35.5" (90cm)	18	72
LAP4722AC	47" (1.2m)	22	88

